



All ports PoE+ with up to 760W PoE budget  
and Remote Management option  
Select your new network engine!

As a leading provider of network equipment for SMBs, Benchu group understands the importance of providing a great choice of PoE port counts and power budgets that can adapt to your business' needs, whether in the hospitality, catering, education or retail domains.

The SP7500-48PGE4TF-L3M and SP7500-48PGE4TF-L3M-800W Gigabit Ethernet Switches with PoE+ and 4 SFP+ Ports join the Benchu group Standalone Smart Switches family, adding full 48 port PoE+

The switch supports modern high-power PoE devices with an impressive PoE power budget of 760W across 48 ports. This makes it an ideal solution for organizations that are planning for long-term infrastructure investment and require future-proofing. By offering a significant PoE power budget, it ensures flexibility, scalability, and sufficient headroom for future network expansion without worrying about power limitations.

Support 4 Ports 1G/2.5G/10G SFP+ Uplink, provides greater bandwidth and powerful processing capacity. It offers a maximum 40Gbps uplink bandwidth through the Four 10Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable (1.25G/2.5G/10G) SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

---

## Highlights

The Benchu group PoE+ Gigabit Smart Switches with Remote Management provides a great value, with configurable L3 network features like VLANs and PoE operation scheduling, allowing SMB customers to deploy PoE-based VoIP phones, IP cameras, video-over-IP endpoints and Wireless access points simply and securely. Advanced features such as IPv4/IPv6 Layer 3 static routing, RIP, OSPF, LACP link aggregation, DiffServ QoS, Private VLANs, Multicast VLAN and Spanning Tree will satisfy even the most advanced small business networks.

### Key features include:

- Layer 3 static routing (IPv4 and IPv6) for interVLAN local routing
- Layer 3 routing, RIP v1/V2, OSPF V1/V2, VRRP
- IPv4 / IPv6 Dual stack and switch virtual interfaces (SVIs)
- Advanced VLAN and Private VLAN support for better network segmentation
- L2/L3/L4 access control lists (ACLs) for granular network access control including 802.1x port authentication
- Advanced per port PoE controls for remote power management of PoE connected devices including operation scheduling (e.g. Wireless APs, IP security cameras, LED lighting, secure access door locks, IoT devices...)
- Advanced QoS (Quality of Service) for traffic prioritization including port-based, 802.1p and L2/L3/L4 DSCP-based
- Auto “denial-of-service” (DoS) prevention
- IGMP Snooping and Querier for multicast optimization
- Dynamic ARP for increased security targeting a class of Man in the Middle attack
- Rate limiting and priority queuing for better bandwidth allocation
- Port mirroring for network monitoring
- Energy Efficient Ethernet (IEEE 802.3az) for maximum power savings
- SNMP v1, v2c and RMON remote monitoring

### Build a future-proof network with BENCHU:

- Solid performance with non-blocking architecture, 32K MAC addresses, 100 shared (ingress) ACLs and 512 Multicast groups
- Comprehensive IPv6 supporting management, QoS, ACL and routing, ensuring investment protection and a smooth migration to IPv6-based network
- PoE+ support on all models and on all ports
- 4 Dedicated SFP+s, not only providing fiber uplinks, but also uplink redundancy and failover, improving reliability and availability for the network

### Fast Access

- The remote units provide the full line-speed forwarding capability. All ports support non-blocking data packet forwarding, providing users with high-speed access experience and meeting the requirements of high-bandwidth services such as HD video conferencing, online video, and large file download.

### BENCHU Quality and Reliability

- Low power consumption, with fan.
- high redundancy design, providing a long term stable PoE power output.
- CE, FCC, RoHS).
- The user-friendly panel can show the device status through the LED indicator of PWR, Link.

### Easy operation and maintenance management

- Web management, CLI command line (Console, Telnet), SNMP (V1/V2).
- HTTPS, and SSHV1/V2.
- RMON, system log, LLDP, and port traffic statistics.
- CPU monitoring, memory monitoring, Ping test, and cable diagnose.



## Hardware at a Glance

FRONT					REAR	SIDE
Model Name	10/100/1000Base-T RJ45 ports	1G/2.5G/10GBASE-X Fiber SFP+ Ports	PoE+ 802.3at Ports	Power Budget	Power Supply	Fans
SP7500-48PGE4TF-L3M-800W	48	4	48 PoE+	800W	1 internal PSU, fixed	2 internal fans, fixed

## Software at a Glance

LAYER 2+ / LAYER 3 LITE FEATURES							
Management	IPv4/IPv6 ACL and QoS	IPv4/IPv6 Multicast Filtering	G.8032 ERPS STP/RSTP/MSTP	IEEE (802.3az) Energy Efficient Ethernet	VLANs	Convergence	IPv4 & IPv6 Static Routing RIP/OSPF/RRP
Web Browser-based GUI (HTTP/HTTPS), PC-Based Smart Control Center Utility (SCC), RMON, SNMP	L2, L3, L4, ingress	IGMP and MLD Snooping	Yes	Yes	Static Dynamic, Voice, MAC, Protocol-based	LLDP-MED, RADIUS, 802.1X	Yes

## Performance at a Glance

Model Name	Packet buffer	CPU	ACLs	MAC Ad- dress Table ARP Table VLANs	Fabric	Latency (Max Connection Speed)	Static Routes (IPv4 & IPv6)	Multicast IGMP Group
SP7500-48PGE4TF-L3M-800W	16MB	Dual-Core 1GHz MIPS InterAptive CPU subsystem 4GB DDR RAM	100 shared	32K MAC 1024 ARP 4K VLANs QinQ	360Gbps 131Mpps line-rate	1G Copper: <3.35µs 10G Fiber: <2.5µs	IPv4: 100 IPv6: 100	512



## Features and Benefits


Hardware Features	
1000BASE-T Copper Ethernet PoE+ connections	Support high-density VoIP, Surveillance and Wi-Fi AP deployments, scal-able for future growth. Never face the risk of running out of PoE ports.
1G/2.5G/10GBASE-X Fiber SFP+ ports	Four dedicated 10G SFP+ ports for aggregation to the network core. Support for Fiber and Copper modules. Can also build dual redundancy by a trunked uplink with link aggregation.
Great choice of PoE port counts and PoE power budgets that can adapt to the business's needs	760W PoE budget available across 48 Gigabit PoE+ ports (802.3at) – Connect multiple power demanding devices to your network with a single wire for power and connectivity.
Energy Efficient Ethernet (IEEE 802.3az)	Maximum power reduction for onging operational cost savings.
Software Features	
Comprehensive IPv6 Support for Management, ACL and QoS	Build current network with future in mind. Ensure investment protection and a smooth migration to an IPv6-based network without switch replacement.
IPv4 & IPv6 Static Routing	A simple way to provide segmentation of the network with internal routing through the switch – reserving the router for external traffic routing only, making the entire network more efficient.
Robust security features: <ul style="list-style-type: none"> <li>• 802.1x authentication (EAP)</li> <li>• Port-based security by locked MAC</li> <li>• ACL filtering to permit or deny traffic based on MAC and IP addresses</li> </ul>	Build a secured, converged network with all types of traffic by preventing external attacks and blocking malware while allowing secure access for authorized users.
Comprehensive QoS features: <ul style="list-style-type: none"> <li>• Port-based or 802.1p-based prioritization</li> <li>• Layer 3-based (DSCP) prioritization</li> <li>• Port-based ingress and egress rate limiting</li> </ul>	Advanced controls for optimized network performance and better delivery of mission-critical traffic such as voice and video.
IGMP (IPv4) and MLD (IPv6) Snooping and Querier modes with Fast Leave	Facilitate fast receiver joins and leaves for multicast streams. Save cost and improve network efficiency by ensuring multicast traffic only reaches desig-nated receivers without the need of an extra multicast router.



Software Features (continued)	
Protected Ports	Ensure no exchange of unicast, broadcast, or multicast traffic between the protected ports on the switch, thereby improving the security of your converged network. This allows your sensitive phone conversations to stay private and your surveillance video clips can be forwarded to their designated storage device without leakage or alteration.
DHCP Snooping and Dynamic ARP Inspection	Ensure IP address allocation integrity by only allowing DHCP messages from trusted DHCP servers and dropping malformed DHCP messages with a port or MAC address mismatch. Use the DHCP snooping bindings database per port and per VLAN to drop incoming packets that do not match any binding and to enforce source IP/MAC addresses for malicious users traffic elimination.
Dynamic VLAN Assignment (RADIUS)	IP phones and PCs can authenticate on the same port but under different VLAN assignment policies. Users are free to move around and enjoy the same level of network access regardless of their physical location on the network.

## Target Application

### Network Convergence

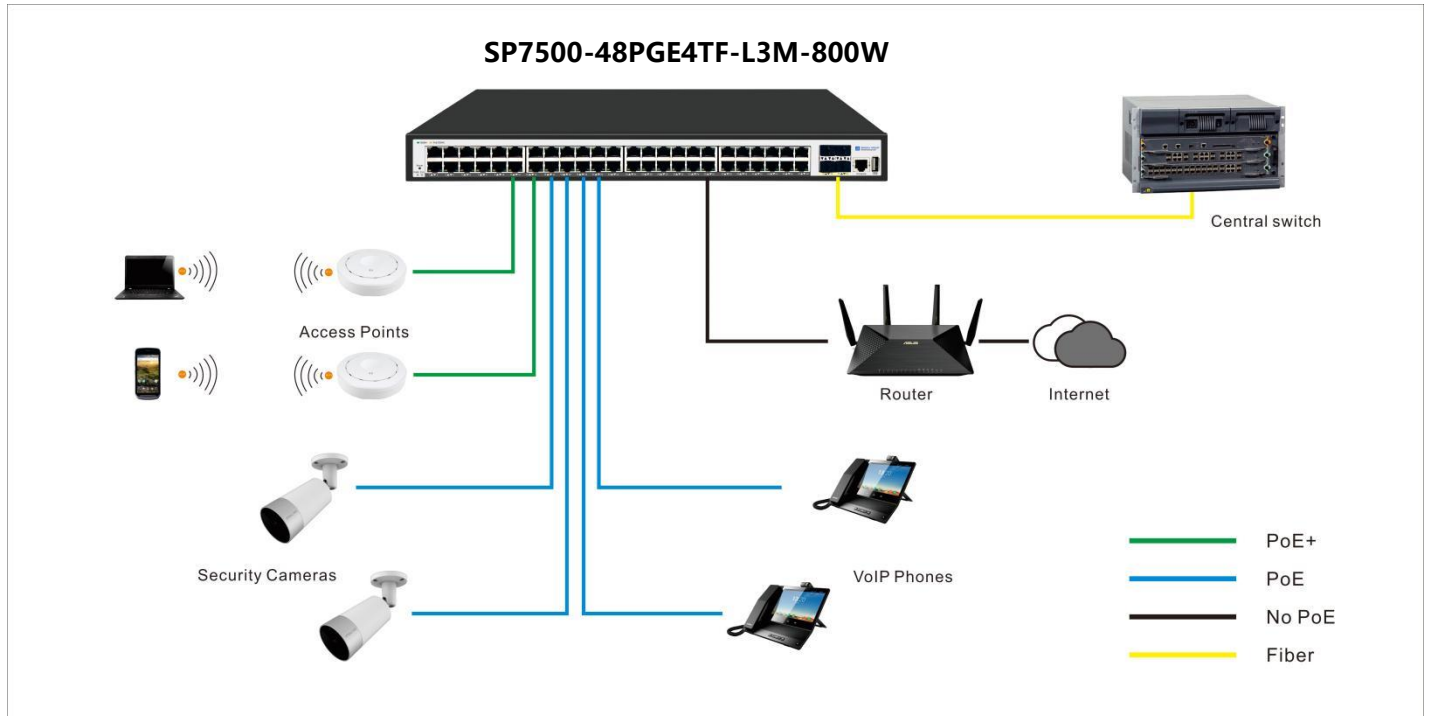


Within small and medium-sized organizations — especially in the hospitality, catering, education, and retail industries — there is growing deployment of VoIP phones, IP security cameras, video-over-IP endpoints, proximity sensors, LED lighting, secure access door locks, and other IoT devices. The dense proximity of these devices requires network switches capable of supporting PoE so a network manager can add power-hungry devices to the network with a single wire for power AND connectivity. Wave 2 802.11ac wireless access points and pan-tilt-zoom HD surveillance cameras with features such as night vision and built-in motion tracking also require PoE+ power (802.3at), increasing the power demands on PoE switches.

The new 48-port BENCHU GROUP Smart Switches support dense deployments of these modern high-power PoE+ devices. They offer powerful Layer 2 and Layer 3 features for IPv4 and IPv6 with enhanced performance and a focus on usability within SMB environments:

- 760W (SP7500-48PGE4TF-L3M-800W) PoE budget across 48 Gigabit PoE+ ports
- 4 dedicated 1G/2.5G/10G SFP+ fiber ports for aggregation to the network core
- Layer 3 static routing (IPv4 and IPv6) for interVLAN local routing
- Layer 3 RIPv1、v2, OSPFv1、v2, VRRP for multiple routing
- IGMP Snooping, IGMP Querier and IGMP Fast Leave for multicast optimization
- ERPS(G.8032) STP/FSTP/MSTP for Ring network and Link protection
- Include VLANs, PoE scheduling, ACLs, DiffServ, LACP, MVR and DHCP
- Easy-to-use Web browser-based management GUI — No need for an IT expert
- Limited Lifetime\* Warranty, Tech support

## Structure Diagrams

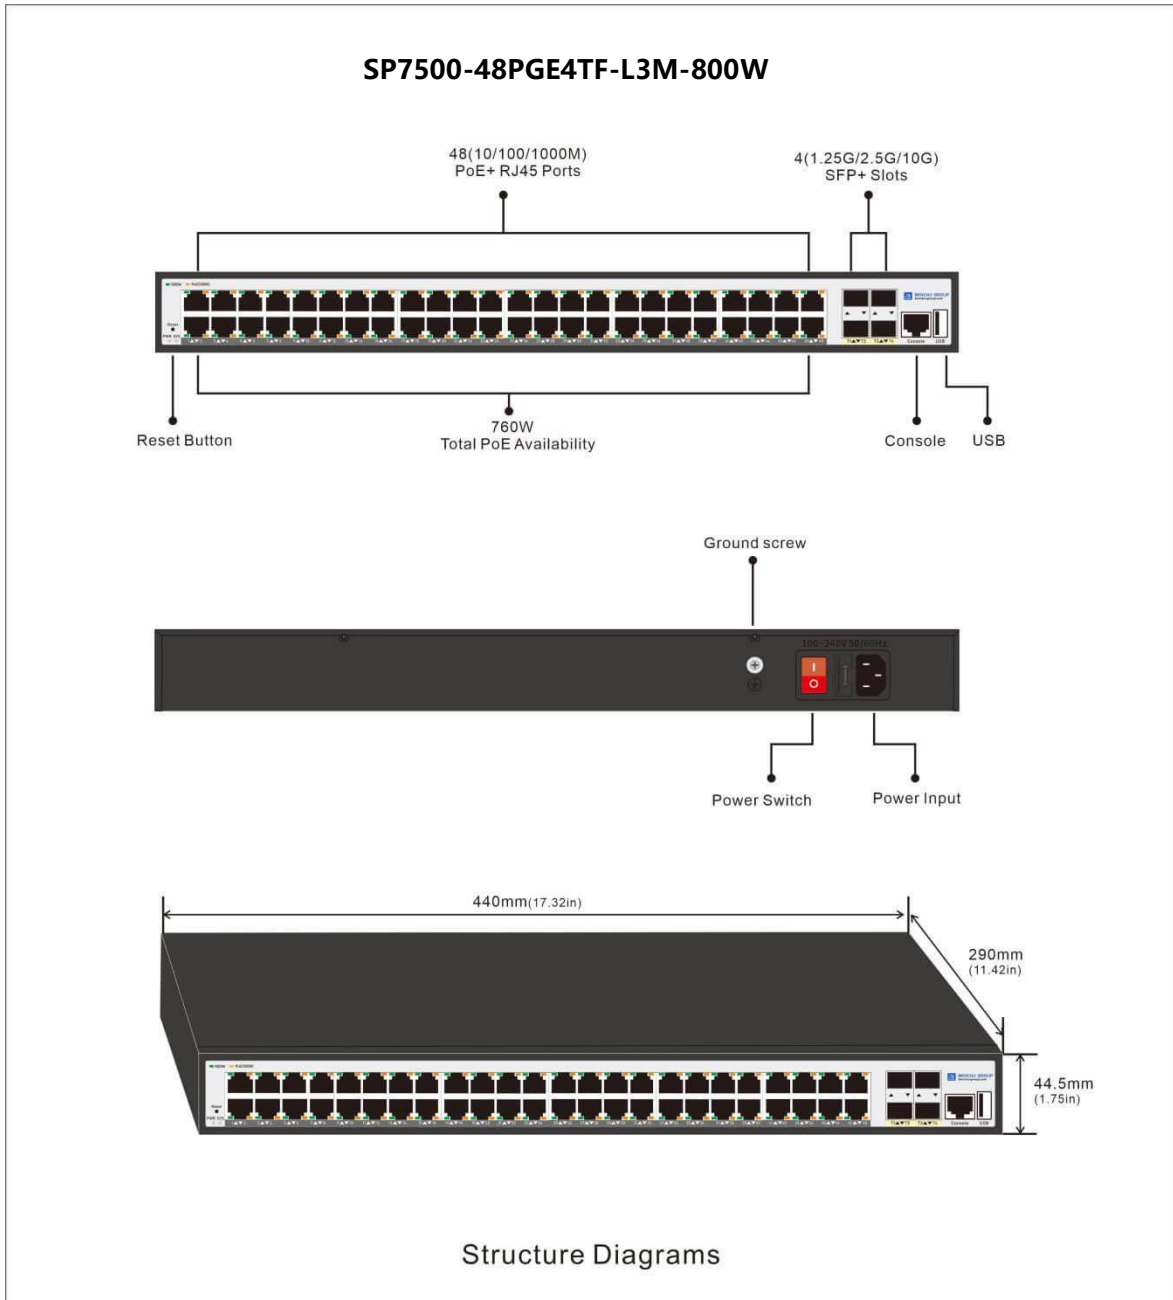



Technical Specifications	SP7500-48PGE4TF-L3M-800W
10M/100M/1G RJ-45 copper ports	48
PoE / PoE+ ports	48 PoE+ (760W PoE budget)
1G/2.5G/10G SFP+ (fiber) ports	4 (dedicated)
Console Port (For config )	Yes
USB port (for config file upload/backup & firm-ware updates)	Yes
Performance Specification	
CPU	Dual-Core 1GHz MIPS InterAptive CPU subsystem
Packet buffer memory (Dynamically shared across only used ports)	16 MB
Forwarding modes	Store-and-forward
Bandwidth	360 Gbps
Priority queues	8
MAC address database size (48-bit MAC addresses)	32K
Multicast groups	1K
Number of IPv4 static routes	32
Number of IPv6 static routes	32
Number of VLANs	4094
Number of VLANs(Open QinQ)	16,760,836(4094*4094)
Number of ARP cache entries	1024 ARP
Number of DHCP snooping bindings	512
Access Control Lists (ACLs)	100 shared for MAC, IP and IPv6 ACLs (ingress)
Packet forwarding rate (64 byte packet size) (Mpps)	131Mbps
Jumbo frame support (bytes)	Up to 12K packet size
Mean Time Between Failures (MTBF) @ 25°C	117,549 hours
100M Copper Latency (64-byte; 1518-byte; 9216-byte frames)	8.314µs; 8.612µs; 8.451µs
1G Copper Latency (64-byte; 1518-byte; 9216-byte frames)	3.614µs; 3.545µs; 3.628µs
1G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.980µs; 3.101µs; 3.179µs
10G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.330µs; 2.561µs; 2.7129µs



<b>L2 Services - VLANs</b>		<b>SP7500-48PGE4TF-L3M-800W</b>
IEEE 802.1Q VLAN tagging		Yes
QinQ VLAN tagging		Yes
IP-based VLANs		Yes
MAC-based VLANs		Yes
Protocol-based VLAN		Yes
Voice VLAN		Yes
VLAN mapping		Yes
<b>L2 Services - Availability</b>		
Broadcast, multicast, unknown unicast storm control		Yes
IEEE 802.3ad - LAGs (LACP)		Yes
IEEE 802.3x (full duplex and flow control)		Yes
IEEE 802.1D Spanning Tree Protocol		Yes
IEEE 802.1w Rapid Spanning Tree Protocol		Yes
IEEE 802.1s Multiple Spanning Tree Protocol		Yes
Layer 2 DHCP Relay		Yes
<b>L2 Services - Multicast Filtering</b>		
IGMP snooping (v1, v2 and v3)		Yes
MLD snooping support (v1 and v2)		Yes
IGMP snooping querier (v2)		Yes
MLD snooping querier (v1)		Yes
Multicast VLAN Registration (MVR)		Yes
<b>L3 Services - DHCP</b>		
DHCP client		Yes
DHCP snooping		Yes
DHCP Server		Yes
<b>L3 Services - Routing</b>		
IPv4 static routing		32
IPv6 static routing		32
VLAN routing		Yes
RIP V1/V2		Yes
OSPF V2		Yes
Number of IP VLAN interfaces(routed VLANs)		15
Policy routing		Yes
VRRP		Yes



Link Aggregation	SP7500-48PGE4TF-L3M-800W
IEEE 802.3ad - LAGs (LACP)	Yes
Manual LAG	Yes
# of LAGs / # of members in each LAG	8 LAGs with max 8 members in each LAG
Network Monitoring and Discovery Services	
802.1ab LLDP	Yes
SNMP	v1, v2c, v3
RMON group 1,2,3,9	Yes
Network Security	
IEEE 802.1x	Yes
RADIUS accounting	Yes
Access Control Lists (ACLs)	Yes
IP-based ACLs (IPv4 and IPv6)	L2 / L3 / L4
MAC-based ACLs	Yes
TCP/UDP-based ACLs	Yes
Control MAC # static entries	48
Port-based security by locked MAC addresses	Yes
Dynamic ARP inspection	Yes
Broadcast, unicast, multicast DoS protection	Yes
DoS attacks prevention	Yes
Network storm protection, DoS	Yes
Broadcast, unicast, multicast DoS protection	Yes
DoS attacks prevention	Yes
Quality of Service (QoS)	
Port-based rate limiting	Yes ingress and egress
Port-based QoS	Yes
Support for IPv6 fields	Yes
DiffServ QoS	Yes ingress
IEEE 802.1p COS	Yes
Destination MAC and IP	Yes
IPv4 and v6 DSCP	Yes
TCP/UDP-based	Yes
Weighted Round Robin (WRR)	Yes
Strict priority queue technology	Yes

IEEE Network Protocols	SP7500-48PGE4TF-L3M-800W
<ul style="list-style-type: none"> <li>• IEEE 802.3 Ethernet</li> <li>• IEEE 802.3u 100BASE-T</li> <li>• IEEE 802.3ab 1000BASE-T</li> <li>• IEEE 802.3z 1000BASE-SX/LX</li> <li>• IEEE 802.3bz 2.5G BASE-X</li> <li>• IEEE 802.3ae 10G BASE-X</li> <li>• IEEE 802.3af PoE</li> <li>• IEEE 802.3at PoE+</li> <li>• IEEE 802.3az Energy Efficient Ethernet (EEE)</li> </ul>	<ul style="list-style-type: none"> <li>• IEEE 802.3ad Trunking (LACP)</li> <li>• IEEE 802.3x Full-Duplex Flow Control</li> <li>• IEEE 802.1Q VLAN Tagging</li> <li>• IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED)</li> <li>• IEEE 802.1p Class of Service</li> <li>• IEEE 802.1D Spanning Tree (STP)</li> <li>• IEEE 802.1s Multiple Spanning Tree (MSTP)</li> <li>• IEEE 802.1w Rapid Spanning Tree (RSTP)</li> <li>• IEEE 802.1x RADIUS Network Access Control</li> </ul>
Management, Monitoring & Troubleshooting	
Password management	Yes
Admin access control via RADIUS and TACACS+	Yes
IPv6 management	Yes
SNMP v1/v2c/v3	Yes
RMON group 1,2,3,9	Yes
Port mirroring	Yes ingress and egress
Many-to-one port mirroring	48
Cable test utility	Yes
TLS/HTTPS Web-based access (version)	Yes (v1.2)
File transfers (uploads, downloads)	TFTP / HTTP
HTTP upload/download (firmware)	Yes
Syslog (RFC 3164)	Yes
USB port for firmware and config upload/download	Yes
LEDs	Yes
Per port	Speed, Link, Activity; or PoE in different mode
Per device	Power, system
Physical Specifications	Yes
Dimensions	440 x 290 x 44.5 mm (17.32 x 11.42 x 1.75 in)
Weight	5.03 kg (11.08 lb)
Power Consumption (when all ports used, line-rate traffic and max PoE)	760W
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	18W
Idle power consumption (all ports link-down standby) (Watts)	12W
Energy Efficient Ethernet (EEE) IEEE 802.3az	Yes (deactivated by default)
Fan	2

Environmental Specifications		SP7500-48PGE4TF-L3M-800W
<b>Operating</b>		
Operating Temperature	-20° to 50°C (-4° to 122°F)	
Humidity	90% maximum relative humidity (RH), non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
<b>Storage</b>		
Storage Temperature	-30° to 70°C (-22° to 158°F)	
Humidity (relative)	95% maximum relative humidity, non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
<b>Electromagnetic Emissions and Immunity</b>		
Certifications	CE mark, commercial	
	FCC Part 15 Class A, VCCI Class A	
	Class A EN 55022 (CISPR 22) Class A	
	Class A C-Tick	
	EN 55024	
	CCC	
	47 CFR FCC Part 15, SubpartB, Class A ICES-003: 2016 Issue 6, Class A	
	ANSI C63.4:2014	
	IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS CISPR 22:2009+A1:2010 CLASS A	
<b>Safety</b>		
Certifications	CB mark, commercial	
	CSA certified (CSA 22.2 #950)	
	EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013	
	AN/NZS 60950.1:2015	
	CCC (China Compulsory Certificate)	
<b>Warranty and Support</b>		
Hardware Limited Warranty	Limited Lifetime*	
Technical Support via Phone and Email*	Limited Lifetime*	
Limited Lifetime* 24x7 Online Chat Technical Support	Limited Lifetime*	
<b>Package Contents</b>		
All models	Smart Switch	
	AC Power cord with C13 connector (localized to region of sale)	
	Brackets and screws for rack mounting	
	Rubber protection caps, which are already installed in the SFP sockets Installation guide	