



All ports PoE+ with up to 120W PoE budget
and Remote Management option
Select your new network engine!

As a leading provider of network equipment for SMBs, Benchu group understands the importance of providing a great choice of PoE port counts and power budgets that can adapt to your business' needs, whether in the hospitality, catering, education or retail domains.

The SP7500-8PGE2GF-L2M Gigabit Ethernet Switches with PoE+ and 2 SFP+ Ports join the Benchu group Standalone Smart Switches family, adding full 8 port PoE+

support for deployment of modern high-power PoE devices. Cautious spender organizations can now deploy denser PoE+ devices connected to a cost-effective switch, with a reasonable PoE power budget of 120W over 8-port. Organizations who buy infrastructure for the long term and want future proofing for the unforeseeable can now select a switch with a PoE power budget of 240W

Support 2 Ports 1G SFP Uplink, provides greater bandwidth and powerful processing capacity. It offers a maximum 0Gbps uplink bandwidth through the two 1Gbps SFP ports. In addition, the administrator can flexibly choose the suitable (1.25G) SFP transceiver according to the transmission distance required to extend the network efficiently.

Highlights

The Benchu group SP7500-8PGE2GF-L2M PoE+ Gigabit Smart Switches with Remote Management provides a great value, with configurable L2 network features like VLANs and PoE operation scheduling, allowing SMB customers to deploy PoE-based VoIP phones, IP cameras, video-over-IP endpoints and Wireless access points simply and securely. Advanced features such as IPv4/IPv6 Layer 3 static routing, LACP link aggregation, DiffServ QoS, Private VLANs, Multicast VLAN and Spanning Tree will satisfy even the most advanced small business networks.

Key features include:

- Layer 3 static routing (IPv4 and IPv6)
- Advanced VLAN and Private VLAN support for better network segmentation
- L2/L3/L4 access control lists (ACLs) for granular network access control including 802.1x port authentication
- Advanced per port PoE controls for remote power management of PoE connected devices including operation scheduling (e.g. Wireless APs, IP security cameras, LED lighting, secure access door locks, IoT devices...)
- Advanced QoS (Quality of Service) for traffic prioritization including port-based, 802.1p and L2/L3/L4 DSCP-based
- IGMP Snooping and Querier for multicast optimization
- Dynamic ARP for increased security targeting a class of Man in the Middle attack
- Rate limiting and priority queuing for better bandwidth allocation
- Port mirroring for network monitoring
- Energy Efficient Ethernet (IEEE 802.3az) for maximum power savings
- SNMP v1, v2c and RMON remote monitoring

Build a future-proof network with BENCHU:

- Solid performance with non-blocking architecture, 8K MAC addresses, 100 shared (ingress) ACLs and 128 Multicast groups
- Comprehensive IPv6 supporting management, QoS, ACL and routing, ensuring investment protection and a smooth migration to IPv6-based network
- PoE+ support on all models and on all ports
- 2 Dedicated SFPs, not only providing fiber uplinks, but also uplink redundancy and failover, improving reliability and availability for the network

Fast Access

- The remote units provide the full line-speed forwarding capability. All ports support non-blocking data packet forwarding, providing users with high-speed access experience and meeting the requirements of high-bandwidth services such as HD video conferencing, online video, and large file download.

BENCHU Quality and Reliability

- Low power consumption, fanless, high-strength metal casing.
- high redundancy design, providing a long term and stable PoE power output.
- CE, FCC, RoHS, CB.
- The user-friendly panel can show the device status through the LED indicator of PWR, Link.

Easy operation and maintenance management

- Web management, CLI command line (Console, Telnet), SNMP (V1/V2).
- HTTPS, and SSHV1/V2.
- RMON, system log, LLDP, and port traffic statistics.
- CPU monitoring, memory monitoring, Ping test, and cable diagnose.



Hardware at a Glance

FRONT				REAR	SIDE
Model Name	10/100/1000Base-T RJ45 ports	1GBASE-X Fiber SFP Ports	PoE+ 802.3at Ports (Budget)	Power Supply	Fans
SP7500-8PGE2GF-L2M	8	2	8 PoE+ (120W)	1 internal PSU, fixed	fanless

Software at a Glance

LAYER 2+ / LAYER 3 LITE FEATURES							
Management	IPv4/IPv6 ACL and QoS	IPv4/IPv6 Multicast Filtering	G.8032 ERPS STP/RSTP/MSTP	IEEE (802.3az) Energy Efficient Ethernet	VLANs	Convergence	IPv4 & IPv6 Static Routing
Web Browser-based GUI (HTTP/HTTPS), PC-Based Smart Control Center Utility (SCC) , RMON, SNMP	L2, L3, L4, ingress	IGMP and MLD Snooping	Yes	Yes	Static Dynamic, Voice,MAC, Protocol-based	LLDP-MED, RADIUS, 802.1X	Yes

Performance at a Glance


Model Name	Packet buffer	CPU	ACLs	MAC Address Table ARP Table VLANs	Fabric	Latency (Max Connection Speed)	Routes (IPv4 & IPv6)	Multicast IGMP Group
SP7500-8PGE2GF-L2M	4MB	Serial/Dual I/O mode 32MB SPI Flash Up to 128MB DDR1/DDR2 and 256MB DDR3 for internal MIPS-4KEc	100 shared	8K MAC 256 ARP 4K VLANs QinQ	32Gbps 15Mpps line-rate	1G Copper: <3.35μs 1G Fiber: <2.5μs	IPv4: 32 IPv6: 32	128

Features and Benefits

Hardware Features	
1000BASE-T Copper Ethernet PoE+ connections	Support high-density VoIP, Surveillance and Wi-Fi AP deployments, scal-able for future growth. Never face the risk of running out of PoE ports.
1GBASE-X Fiber SFP ports	Four dedicated 1G SFP ports for aggregation to the network core. Support for Fiber and Copper modules. Can also build dual redundancy by a trunked uplink with link aggregation.
Great choice of PoE port counts and PoE power budgets that can adapt to the business's needs	120W PoE budget available across 8 Gigabit PoE+ ports (802.3af/at) – Connect multiple power demanding devices to your network with a single wire for power and connectivity.
Energy Efficient Ethernet (IEEE 802.3az)	Maximum power reduction for onging operational cost savings.
Software Features	
Comprehensive IPv6 Support for Management, ACL and QoS	Build current network with future in mind. Ensure investment protection and a smooth migration to an IPv6-based network without switch replacement.
IPv4 & IPv6 Static Routing	A simple way to provide segmentation of the network with internal routing through the switch – reserving the router for external traffic routing only, making the entire network more efficient.
Robust security features: <ul style="list-style-type: none"> • 802.1x authentication (EAP) • Port-based security by locked MAC • ACL filtering to permit or deny traffic based on MAC and IP addresses 	Build a secured, converged network with all types of traffic by preventing external attacks and blocking malware while allowing secure access for authorized users.
Comprehensive QoS features: <ul style="list-style-type: none"> • Port-based or 802.1p-based prioritization • Layer 3-based (DSCP) prioritization • Port-based ingress and egress rate limiting 	Advanced controls for optimized network performance and better delivery of mission-critical traffic such as voice and video.
IGMP (IPv4) and MLD (IPv6) Snooping and Querier modes with Fast Leave	Facilitate fast receiver joins and leaves for multicast streams. Save cost and improve network efficiency by ensuring multicast traffic only reaches desig-nated receivers without the need of an extra multicast router.

Target Application

Network Convergence

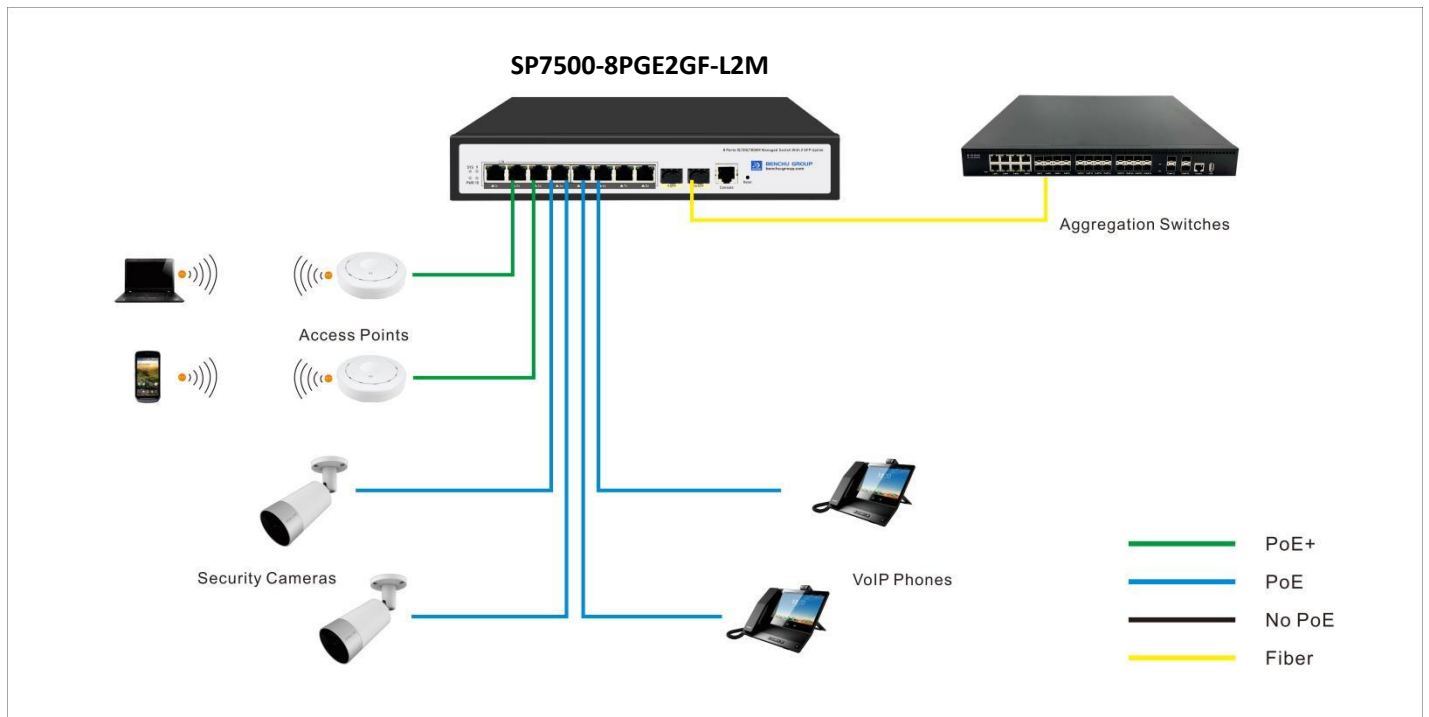


Within small and medium-sized organizations — especially in the hospitality, catering, education, and retail industries — there is growing deployment of VoIP phones, IP security cameras, video-over-IP endpoints, proximity sensors, LED lighting, secure access door locks, and other IoT devices. The dense proximity of these devices requires network switches capable of supporting PoE so a network manager can add power-hungry devices to the network with a single wire for power AND connectivity. Wave 2 802.11ac wireless access points and pan-tilt-zoom HD surveillance cameras with features such as night vision and built-in motion tracking also require PoE+ power (802.3at), increasing the power demands on PoE switches.

The new 8-port BENCHU GROUP Smart Switches support dense deployments of these modern high-power PoE+ devices. They offer powerful Layer 2 and Layer 3 features for IPv4 and IPv6 with enhanced performance and a focus on usability within SMB environments:

- 120W (SP7500-8PGE2GF-L2M) PoE budget across 8 Gigabit PoE+ ports
- 2 dedicated 1.25G SFP fiber ports for aggregation to the network core
- Layer 3 static routing (IPv4 and IPv6) for interVLAN local routing
- IGMP Snooping, IGMP Querier and IGMP Fast Leave for multicast optimization
- ERPS(G.8032) STP/FSTP/MSTP for Ring network and Link protection
- Include VLANs, Private VLAN, PoE scheduling, ACLs, DiffServ, LACP, MVR and DHCP
- Easy-to-use Web browser-based management GUI — No need for an IT expert
- Limited Lifetime* Warranty, Tech support

Structure Diagrams

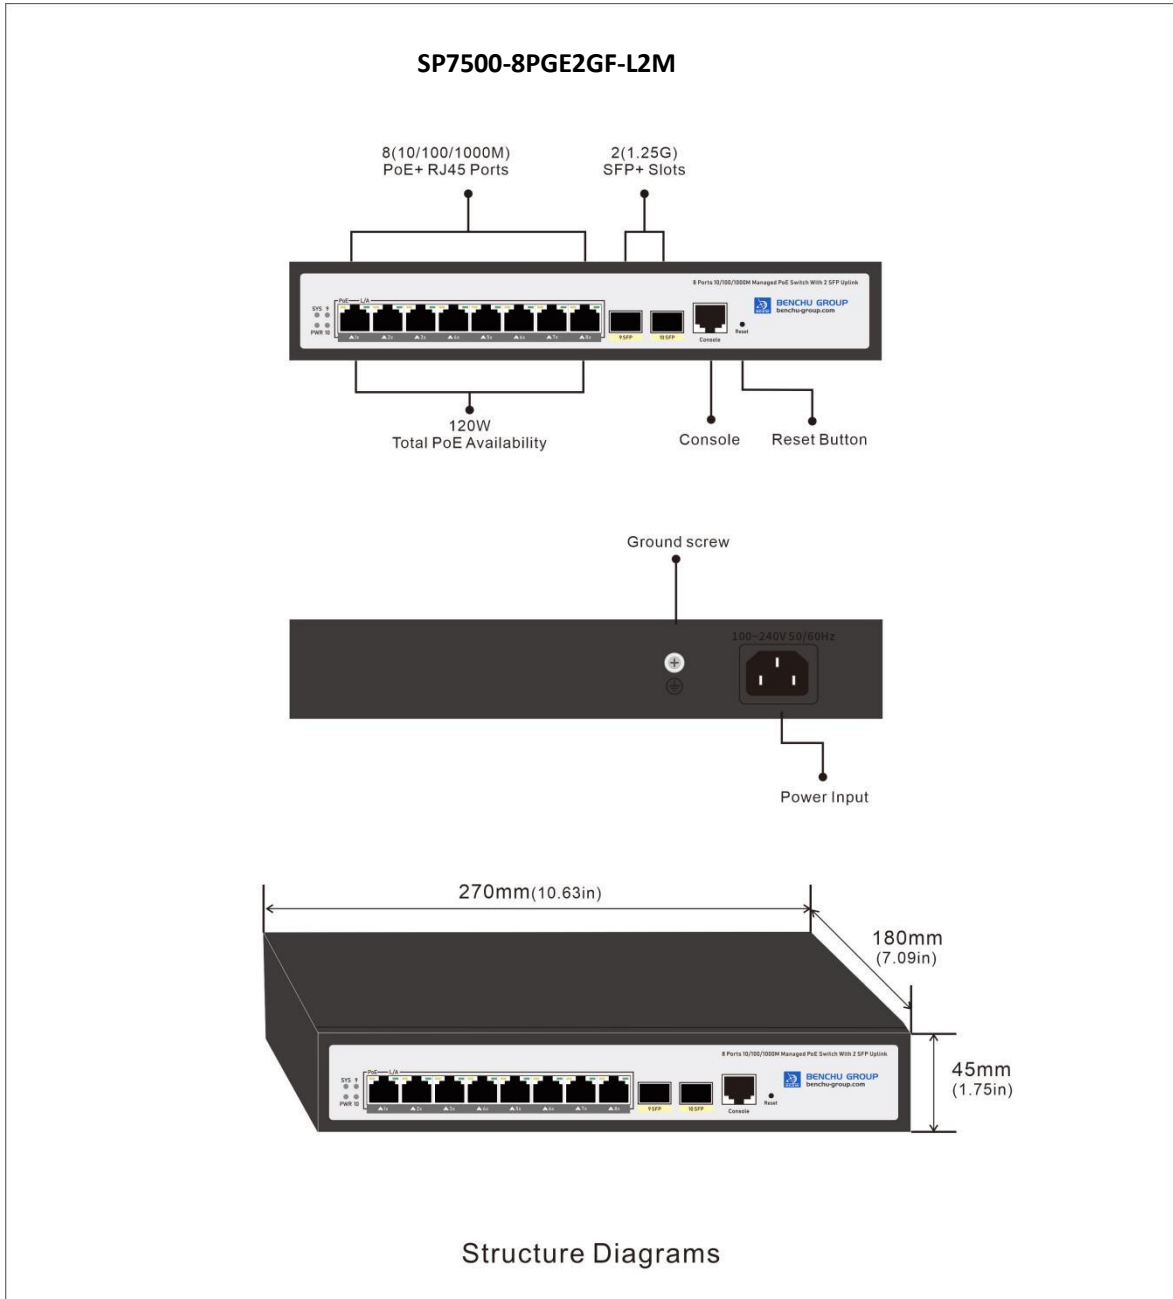



Technical Specifications	SP7500-8PGE2GF-L2M
10M/100M/1000M RJ-45 copper ports	8
PoE / PoE+ ports	8 (120W PoE budget)
1.25G SFP (fiber) ports uplink	2
Console Port (For config)	Yes
Performance Specification	
CPU	Embedded MIPS-4KEc with MMU
Packet buffer memory (Dynamically shared across only used ports)	4MB
Forwarding modes	Store-and-forward
Bandwidth	32Gbps
Priority queues	8
MAC address database size (48-bit MAC addresses)	8K
Multicast groups	128K
Number of IPv4 static routes	32
Number of IPv6 static routes	32
Number of VLANs	4094
Number of VLANs(Open QinQ)	16,760,836(4094*4094)
Number of ARP cache entries	256 ARP
Packet forwarding rate (64 byte packet size) (Mpps)	14.88
Jumbo frame support (bytes)	Up to 9K packet size
Mean Time Between Failures (MTBF) @ 25°C	135,242 hours
100M Copper Latency (64-byte; 1518-byte; 9216-byte frames)	8.331µs; 8.468µs; 8.432µs
1G Copper Latency (64-byte; 1518-byte; 9216-byte frames)	3.446µs; 3.531µs; 3.625µs
1G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.973µs; 3.92µs; 3.175µs

L2 Services - VLANs	SP7500-8PGE2GF-L2M
IEEE 802.1Q VLAN tagging	Yes
QinQ VLAN tagging	Yes
IP-based VLANs	Yes
MAC-based VLANs	Yes
Protocol-based VLAN	Yes
Voice VLAN	Yes
VLAN mapping	Yes
L2 Services - Availability	
Broadcast, multicast, unknown unicast storm control	Yes
IEEE 802.3ad - LAGs (LACP)	Yes
IEEE 802.3x (full duplex and flow control)	Yes
IEEE 802.1D Spanning Tree Protocol	Yes
IEEE 802.1w Rapid Spanning Tree Protocol	Yes
IEEE 802.1s Multiple Spanning Tree Protocol	Yes
ITU-TG.8032 ERPS	Yes, Recovery time < 50ms
L2 Services - Multicast Filtering	
IGMP snooping (v1, v2 and v3)	Yes
MLD snooping support (v1 and v2)	Yes
IGMP snooping querier (v2)	Yes
MLD snooping querier (v1)	Yes
Multicast VLAN Registration (MVR)	Yes
L3 Services - DHCP	
DHCP client	Yes
DHCP snooping	Yes
L3 Services - Routing	
IPv4 static routing	32
IPv6 static routing	32

Link Aggregation	SP7500-8PGE2GF-L2M
IEEE 802.3ad - LAGs (LACP)	Yes
Manual LAG	Yes
# of LAGs / # of members in each LAG	8 LAGs with max 8 members in each LAG
Network Monitoring and Discovery Services	
802.1ab LLDP	Yes
SNMP	v1, v2c, v3
RMON group 1,2,3,9	Yes
Network Security	
IEEE 802.1x	Yes
RADIUS accounting	Yes
Access Control Lists (ACLs)	Yes
IP-based ACLs (IPv4 and IPv6)	L2 / L3 / L4
MAC-based ACLs	Yes
TCP/UDP-based ACLs	Yes
Control MAC # static entries	24
Port-based security by locked MAC addresses	Yes
Dynamic ARP inspection	Yes
Quality of Service (QoS)	
Port-based rate limiting	Yes ingress and egress
Port-based QoS	Yes
Support for IPv6 fields	Yes
DiffServ QoS	Yes ingress
IEEE 802.1p COS	Yes
Destination MAC and IP	Yes
IPv4 and v6 DSCP	Yes
TCP/UDP-based	Yes
Weighted Round Robin (WRR)	Yes
Strict priority queue technology	Yes

IEEE Network Protocols		SP7500-16PGE2GF-L2M
<ul style="list-style-type: none"> IEEE 802.3 Ethernet IEEE 802.3u 100BASE-T IEEE 802.3ab 1000BASE-T IEEE 802.3z Gigabit Ethernet 1000BASE-SX/LX IEEE 802.3af PoE IEEE 802.3at PoE+ IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3ad Trunking (LACP) 	<ul style="list-style-type: none"> IEEE 802.3x Full-Duplex Flow Control IEEE 802.1Q VLAN Tagging IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED) IEEE 802.1p Class of Service IEEE 802.1D Spanning Tree (STP) IEEE 802.1s Multiple Spanning Tree (MSTP) IEEE 802.1w Rapid Spanning Tree (RSTP) ITU-TG.8032 Ethernet Ring Protection Switching (ERPS) IEEE 802.1x RADIUS Network Access Control 	
Management, Monitoring & Troubleshooting		
Password management		Yes
Admin access control via RADIUS and TACACS+		Yes
IPv6 management		Yes
SNMP v1/v2C/v3		Yes
RMON group 1,2,3,9		Yes
Port mirroring		Yes ingress and egress
Many-to-one port mirroring		8
Cable test utility		Yes
TLS/HTTPS Web-based access (version)		Yes (v1.2)
File transfers (uploads, downloads)		TFTP / HTTP
HTTP upload/download (firmware)		Yes
Syslog (RFC 3164)		Yes
LEDs		Yes
Per port		Speed, Link, Activity; or PoE in different mode
Per device		Power, system
Physical Specifications		
Dimensions		270 x 180 x 44.5 mm (10.63 x 7.09 x 1.75 in)
Weight		1.6 kg (3.5 lb)
Power Requirements		AC 100~240V 50/60Hz
Power Consumption (when all ports used, line-rate traffic and max PoE)		120W
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)		12W
Idle power consumption (all ports link-down standby) (Watts)		8W
Energy Efficient Ethernet (EEE) IEEE 802.3az		Yes (deactivated by default)

Environmental Specifications		SP7500-8PGE2GF-L2M
Operating		
Operating Temperature	-20° to 50°C (-4° to 122°F)	
Humidity	90% maximum relative humidity (RH), non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
Storage		
Storage Temperature	-20° to 70°C (-4° to 158°F)	
Humidity (relative)	95% maximum relative humidity, non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
Electromagnetic Emissions and Immunity		
Certifications	CE mark, commercial; FCC Part 15 Class A, VCCI Class A; Class A EN 55022 (CISPR 22) Class A; Class A C-Tick; EN 55024; CCC; 47 CFR FCC Part 15, SubpartB, Class A ICES-003: 2016 Issue 6, Class A; ANSI C63.4:2014; IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS CISPR 22:2009+A1:2010 CLASS A	
Safety		
Certifications	CB mark, commercial; CSA certified (CSA 22.2 #950); EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 IEC 60950-1:2005; (ed.2)+A1:2009+A2:2013; AN/NZS 60950.1:2015; CCC (China Compulsory Certificate)	
Warranty and Support		
Hardware Limited Warranty	Limited Lifetime*	
Technical Support via Phone and Email*	Limited Lifetime*	
Limited Lifetime* 24x7 Online Chat Technical Support	Limited Lifetime*	
Package Contents		
All models	Smart PoE Switch; AC Power cord with C13 connector (localized to region of sale) ; Brackets and screws for rack mounting; Rubber protection caps, which are already installed in the SFP sockets Installation guide User's manual	