



Outstanding 802.3at PoE+ Solution for  
Hardened Environment  
Select your new network engine!

As a leading provider of network equipment for Industrial Communication, Benchu group understands the importance of providing stability and safety that can adapt to your business' needs, whether in the Safe City, Traffic, Mining, industrial automatic, Power or energy. The IES7521-24PGE8GFC4TF-DC meet EMC industrial level 4 requirements. The product supports wide power input voltage range of 100-260V AC redundant power with reverse polarity protection and wide operating temperature range of -30 to the +75°C.

The switches can be easily installed on a 19in rack as well as in distribution boxes. Each product has passed a 100% burn-in test to ensure its quality high-reliability transmission. supports SSHv2, TLS and SSL protocols to provide strong protection against advanced threats. It includes a range of cybersecurity features such as DHCP Snooping, IP Source Guard, ARP Inspection Protection, 802.1x port-based and MAC-based network access control, RADIUS and TACACS+ user accounts management, SNMPv3 authentication, and so on to complement it as an all-security solution.

Support 4 Ports 1G/2.5G/10G SFP+ Uplink, provides greater bandwidth and powerful processing capacity. It offers a maximum 40Gbps uplink bandwidth through the Four 10Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable (1.25G/2.5G/10G) SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

---

## Highlights

Benchu group IES7521-24PGE8GFC4TF-AC L3 Industrial Managed PoE+ Switch, featuring 24-10/100/1000BASE-T 802.3at PoE+ ports with each port powering up to 30 watts, with 8-1.25GBASE-X SFP Fiber Ports combo, and 4-1G/2.5G/10GBASE-X fiber ports, with rugged metal case, can be installed in any difficult environment. It provides user-friendly yet advanced IPv6/IPv4 management interfaces, abundant L2/L4 switching functions, Layer 3 OSPFv2 dynamic routing capability, and advanced ITU-G.8032 ERPS Ring technology to improve the rapid self-recovery capability. It is able to operate reliably, stably and quietly in the temperature range from -30 to 75 degrees C.

#### Key features include:

- Layer 3 static routing (IPv4 and IPv6) for interVLAN local routing
- Layer 3 routing, RIP v1/V2, OSPF V1/V2, VRRP
- L2/L3/L4 access control lists (ACLs) for granular network access control including 802.1x port authentication
- Advanced per port PoE controls for remote power management of PoE connected devices including operation scheduling (e.g. Wireless APs, IP security cameras, LED lighting, secure access door locks, IoT devices...)
- Advanced QoS (Quality of Service) for traffic prioritization including port-based, 802.1p and L2/L3/L4 DSCP-based
- STP, RSTP, MSTP, and ERPS ring network protocols are designed for building high reliability and maintaining network stability.
- IGMP Snooping and Querier for multicast optimization
- Dynamic ARP for increased security targeting a class of Man in the Middle attack
- Rate limiting and priority queuing for better bandwidth allocation
- Port mirroring for network monitoring
- Energy Efficient Ethernet (IEEE 802.3az) for maximum power savings
- SNMP v1, v2c, v3 and RMON remote monitoring

#### Build a future-proof network with BENCHU:

- Solid performance with non-blocking architecture, 16K MAC addresses, 100 shared (ingress) ACLs and 512 Multicast groups
- Comprehensive IPv6 supporting management, QoS, ACL and routing, ensuring investment protection and a smooth migration to IPv6-based network
- support IEEE802.3af, IEEE802.3at standard on all PoE ports
- 4 Dedicated SFP+, not only providing fiber uplinks, but also uplink redundancy and failover, improving reliability and availability for the network

#### Redundant Ring, Fast Recovery for Critical Network Applications

- The IES7521-24PGE8GFC4TF-AC supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T G.8032 ERPS (Ethernet Ring Protection Switching) technology, Spanning Tree Protocol (802.1s MSTP), and redundant power input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments. In a certain simple Ring network, the recovery time of data link can be as fast as 10ms.

#### BENCHU Quality and Reliability

- Low power consumption, fanless, high-strength metal casing.
- Contact Discharge 8KV DC; Air Discharge 15KV DC
- -30 to 75 degrees operating temperature
- Industrial design with dual power input
- Rack mounting installation
- CE, FCC, RoHS, CB.
- The user-friendly panel can show the device status through the LED indicator of PWR, Link.

#### Easy operation and maintenance management

- Web management, CLI command line (Console, Telnet), SNMP (V1/V2).
- HTTPS, and SSHV1/V2.
- RMON, system log, LLDP, and port traffic statistics.
- CPU monitoring, memory monitoring, Ping test, and cable diagnose.



## Hardware at a Glance

FRONT					REAR		SIDE
Model Name	10/100/1000M RJ45 ports	1G Fiber SFP Ports	1G/2.5G/10G Fiber SFP+ Ports	PoE+ 802.3at Ports	Power Supply		Fans
IES7521-24PGE8GFC4TF-AC	24	8 Combo	4	24 PoE+	500W	1 internal PSU, fixed	fanless

## Software at a Glance


LAYER 2+ / LAYER 3 LITE FEATURES							
Management	IPv4/IPv6 ACL and QoS	IPv4/IPv6 Multicast Filtering	G.8032 ERPS STP/RSTP/MSTP	IEEE (802.3az) Energy Efficient Ethernet	VLANs	Convergence	IPv4 & IPv6 Static Routing RIP/OSPF/RRP
Web Browser-based GUI(HTTP/HTTPS), PC-Based Smart Control Center Utility (SCC) , RMON, SNMP	L2, L3, L4, ingress	IGMP and MLD Snooping	Yes	Yes	Static Dynamic, Voice, MAC, Protocol-based	LLDP-MED, RADIUS, 802.1X	Yes

## Performance at a Glance

Model Name	Packet buffer	CPU	ACLs	MAC Ad- dress Table ARP Table VLANs	Fabric	Latency (Max Connection Speed)	Static Routes (IPv4&IPv6)	Multicast IGMP Group
IES7521-24PGE8GFC4TF-AC	12MB	Realtek	100 shared	16K MAC 512 ARP 4K VLANs QinQ	256Gbps 118Mpps line-rate	1G Copper: <3.35μs 10G Fiber: <2.5μs	IPv4: 100 IPv6: 100	512

## Target Application

### Network Convergence

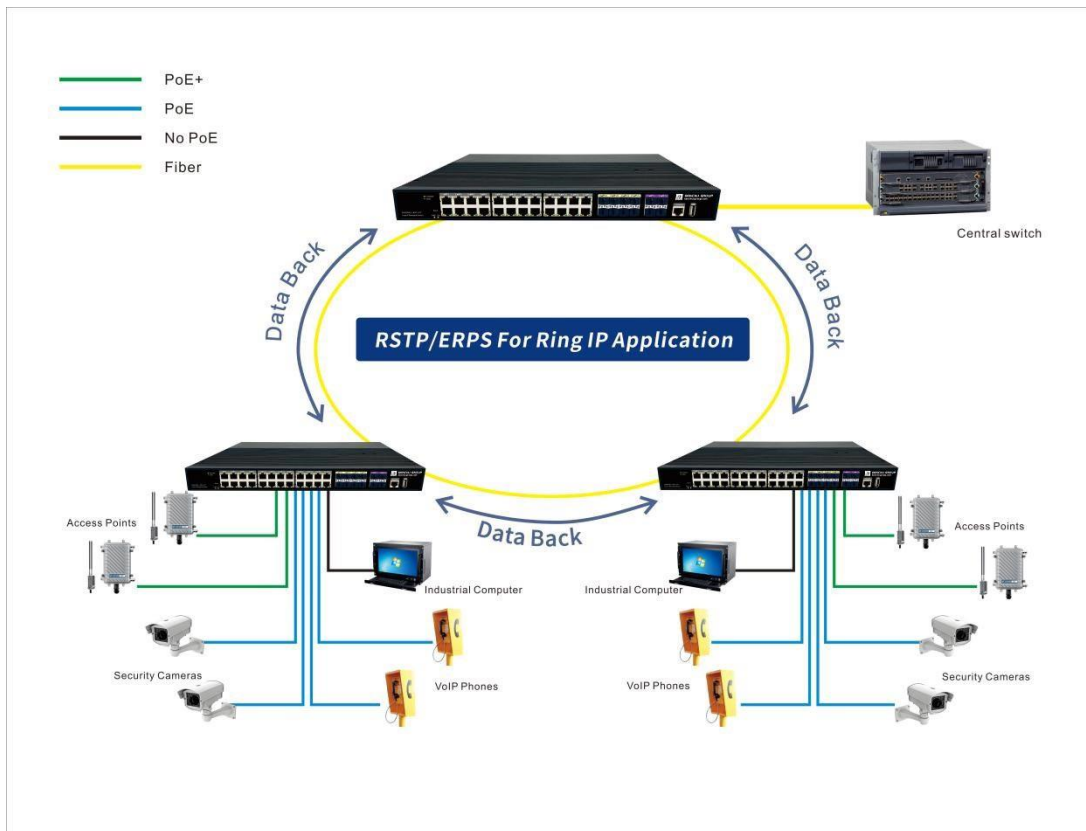


Across various industries—particularly in industrial parks, automation, power, public safety, and energy sectors—the adoption of IoT devices such as VoIP phones, IP security cameras, video-over-IP endpoints, proximity sensors, LED lighting, and secure access door locks is rapidly increasing. The close concentration of these devices demands industrial network switches with PoE capabilities, allowing network managers to connect IoT devices using a single cable for both data and power. Advanced devices like Wave 2 802.11ac wireless access points and HD surveillance cameras with features like night vision and motion tracking require PoE+ (802.3at) power. Additionally, harsh environments necessitate industrial-grade network switches with enhanced durability, further increasing the power requirements for Industrial PoE switches.

The new 24-port BENCHU GROUP smart industrial PoE switch support dense deployments of these modern high-power PoE+ devices. They offer powerful Layer 2 and Layer 3 features for IPv4 and IPv6 with enhanced performance and a focus on usability within Industrial environments:

- Provide 24-10/100/1000M 802.3af/at PoE+ ports, and 8-1.25G SFP fiber ports Combo
- 4 dedicated 1G/2.5G/10G SFP+ fiber ports for aggregation to the network core
- Layer 3 static routing (IPv4 and IPv6) for interVLAN local routing
- Layer 3 RIPv1、v2, OSPFv1、v2, VRRP for multiple routing
- IGMP Snooping, IGMP Querier and IGMP Fast Leave for multicast optimization
- ERPS(G.8032) STP/FSTP/MSTP for Ring network and Link protection
- Include VLANs, PoE scheduling, ACLs, DiffServ, LACP, MVR and DHCP
- Easy-to-use Web browser-based management GUI — No need for an IT expert
- Excellent features such as fast response, resisting vibration, enduring dust, adapting for the hard environment, etc.
- Limited Lifetime\* Warranty, Tech support

## Structure Diagrams

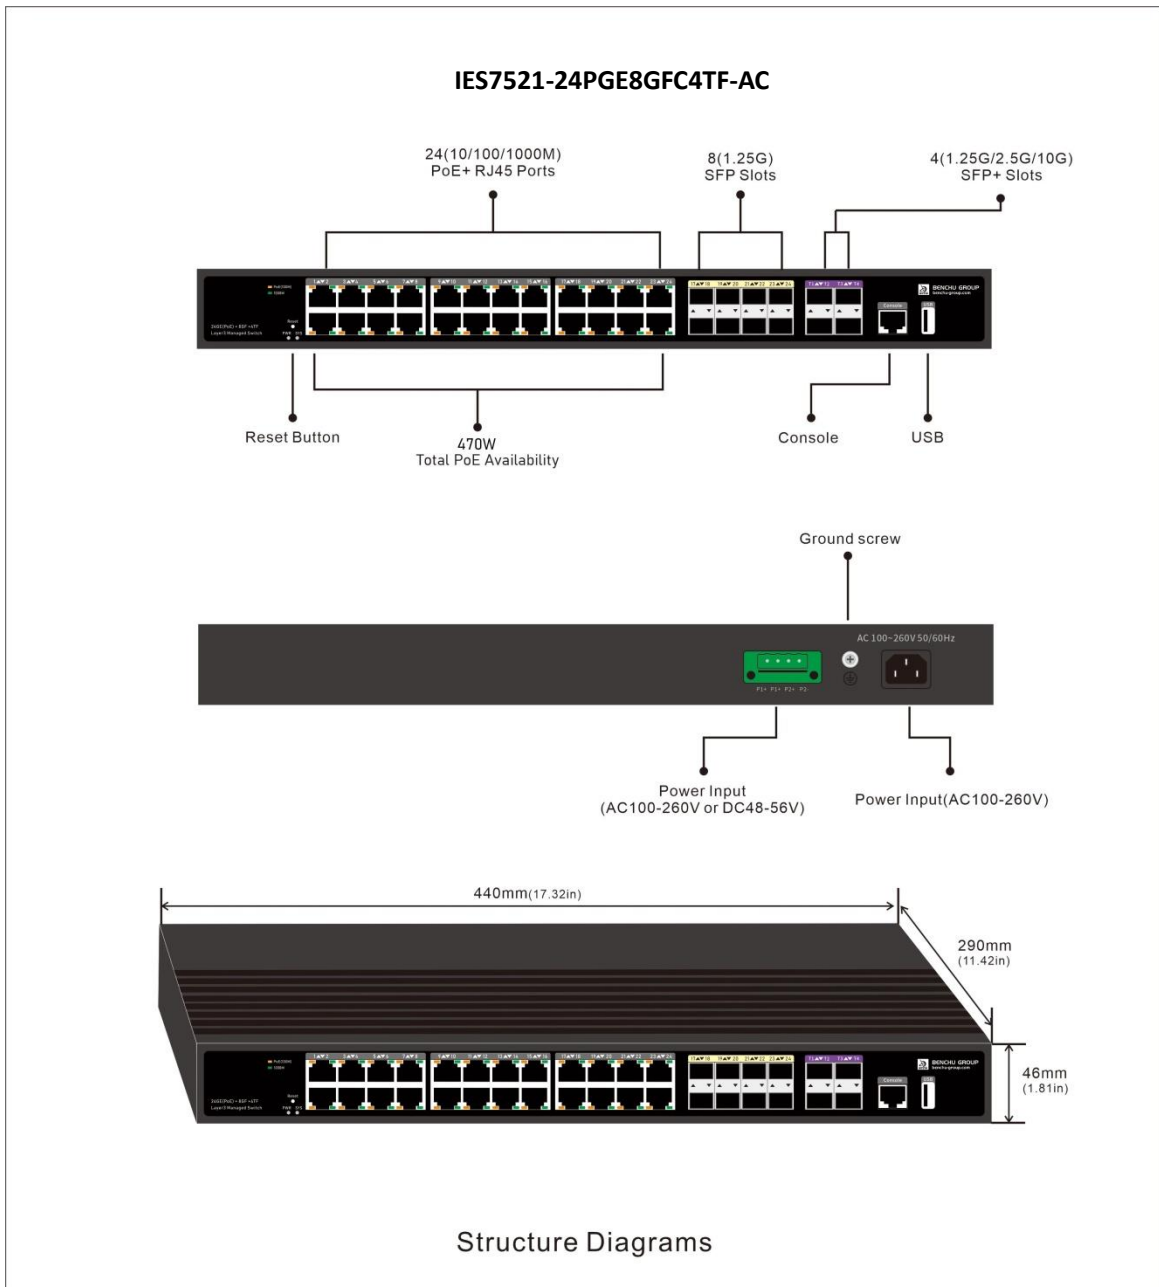



Technical Specifications	IES7521-24PGE8GFC4TF-AC
10M/100M/1G RJ-45 copper ports	24
1.25G SFP (fiber) ports	8 (Combo)
1G/2.5G/10G SFP+ (fiber) ports	4
PoE / PoE+ ports	24 PoE+
Console Port (For config )	Yes
USB port (for config file upload/backup & firm-ware updates)	Yes
Performance Specification	
CPU	Realtek
Packet buffer memory (Dynamically shared across only used ports)	12 MB
Forwarding modes	Store-and-forward
Bandwidth	256 Gbps
Priority queues	8
MAC address database size (48-bit MAC addresses)	16K
Multicast groups	512
Number of IPv4 static routes	100
Number of IPv6 static routes	100
Number of VLANs	4094
Number of VLANs(Open QinQ)	16,760,836(4094*4094)
Number of ARP cache entries	512 ARP
Number of DHCP snooping bindings	512
Access Control Lists (ACLs)	100 shared for MAC, IP and IPv6 ACLs (ingress)
Packet forwarding rate (64 byte packet size) (Mpps)	118Mpps
Jumbo frame support (bytes)	Up to 12K packet size
Mean Time Between Failures (MTBF) @ 25°C	171,165 hours
100M Copper Latency (64-byte; 1518-byte; 9216-byte frames)	8.314µs; 8.352µs; 8.451µs
1G Copper Latency (64-byte; 1518-byte; 9216-byte frames)	3.514µs; 3.545µs; 3.628µs
1G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.980µs; 3.101µs; 3.179µs
10G Fiber Latency (64-byte; 1518-byte; 9216-byte frames)	2.330µs; 2.561µs; 2.7129µs



<b>L2 Services - VLANs</b>	<b>IES7521-24PGE8GFC4TF-AC</b>
IEEE 802.1Q VLAN tagging	Yes
QinQ VLAN tagging	Yes
IP-based VLANs	Yes
MAC-based VLANs	Yes
Protocol-based VLAN	Yes
Voice VLAN	Yes
VLAN mapping	Yes
<b>L2 Services - Availability</b>	
Broadcast, multicast, unknown unicast storm control	Yes
IEEE 802.3ad - LAGs (LACP)	Yes
IEEE 802.3x (full duplex and flow control)	Yes
IEEE 802.1D Spanning Tree Protocol	Yes
IEEE 802.1w Rapid Spanning Tree Protocol	Yes
IEEE 802.1s Multiple Spanning Tree Protocol	Yes
ITU-TG.8032 ERPS	Yes, Recovery time < 50ms
<b>L2 Services - Multicast Filtering</b>	
IGMP snooping (v1, v2 and v3)	Yes
MLD snooping support (v1 and v2)	Yes
IGMP snooping querier (v2)	Yes
MLD snooping querier (v1)	Yes
Multicast VLAN Registration (MVR)	Yes
<b>L3 Services - DHCP</b>	
DHCP client	Yes
DHCP snooping	Yes
DHCP Server	Yes
<b>L3 Services - Routing</b>	
IPv4 static routing	Yes
IPv6 static routing	Yes
VLAN routing	Yes
RIP V1/V2	Yes
OSPF V2	Yes
Number of IP VLAN interfaces(routed VLANs)	15
Policy routing	Yes
VRRP	Yes



Link Aggregation	IES7521-24PGE8GFC4TF-AC
IEEE 802.3ad - LAGs (LACP)	Yes
Manual LAG	Yes
# of LAGs / # of members in each LAG	8 LAGs with max 8 members in each LAG
Network Monitoring and Discovery Services	
802.1ab LLDP	Yes
SNMP	v1, v2c, v3
RMON group 1,2,3,9	Yes
Network Security	
IEEE 802.1x	Yes
RADIUS accounting	Yes
Access Control Lists (ACLs)	Yes
IP-based ACLs (IPv4 and IPv6)	L2 / L3 / L4
MAC-based ACLs	Yes
TCP/UDP-based ACLs	Yes
Control MAC # static entries	48
Port-based security by locked MAC addresses	Yes
Dynamic ARP inspection	Yes
Broadcast, unicast, multicast DoS protection	Yes
DoS attacks prevention	Yes
Network storm protection, DoS	Yes
Broadcast, unicast, multicast DoS protection	Yes
DoS attacks prevention	Yes
Quality of Service (QoS)	
Port-based rate limiting	Yes ingress and egress
Port-based QoS	Yes
Support for IPv6 fields	Yes
DiffServ QoS	Yes ingress
IEEE 802.1p COS	Yes
Destination MAC and IP	Yes
IPv4 and v6 DSCP	Yes
TCP/UDP-based	Yes
Weighted Round Robin (WRR)	Yes
Strict priority queue technology	Yes





IEEE Network Protocols	IES7521-24PGE8GFC4TF-AC
<ul style="list-style-type: none"> <li>• IEEE 802.3 Ethernet</li> <li>• IEEE 802.3u 100BASE-T</li> <li>• IEEE 802.3ab 1000BASE-T</li> <li>• IEEE 802.3z 1000BASE-SX/LX</li> <li>• IEEE 802.3bz 2.5G BASE-X</li> <li>• IEEE 802.3ae 10G BASE-X</li> <li>• IEEE 802.3af PoE</li> <li>• IEEE 802.3at PoE+</li> <li>• IEEE 802.3az Energy Efficient Ethernet (EEE)</li> </ul>	<ul style="list-style-type: none"> <li>• IEEE 802.3ad Trunking (LACP)</li> <li>• IEEE 802.3x Full-Duplex Flow Control</li> <li>• IEEE 802.1Q VLAN Tagging</li> <li>• IEEE 802.1AB LLDP with ANSI/TIA-1057 (LLDP-MED)</li> <li>• IEEE 802.1p Class of Service</li> <li>• IEEE 802.1D Spanning Tree (STP)</li> <li>• IEEE 802.1s Multiple Spanning Tree (MSTP)</li> <li>• IEEE 802.1w Rapid Spanning Tree (RSTP)</li> <li>• ITU-TG.8032 Ethernet Ring Protection Switching (ERPS)</li> </ul>
Management, Monitoring & Troubleshooting	
Password management	Yes
Admin access control via RADIUS and TACACS+	Yes
IPv6 management	Yes
SNMP v1/v2c/v3	Yes
RMON group 1,2,3,9	Yes
Port mirroring	Yes ingress and egress
Many-to-one port mirroring	Yes
Cable test utility	Yes
TLS/HTTPS Web-based access (version)	Yes (v1.2)
File transfers (uploads, downloads)	TFTP / HTTP
HTTP upload/download (firmware)	Yes
Syslog (RFC 3164)	Yes
USB port for firmware and config upload/download	Yes
LEDs	Yes
Per port	Speed, Link, Activity; or PoE in different mode
Per device	Power, system
Physical Specifications	
Dimensions	440 x 290 x 48 mm (17.32 x 11.42 x 1.89 in)
Weight	5.5 kg (12.12 lb)
Power Requirements	AC 100~260V 50/60Hz (Dual power input)
Power Consumption (when all ports used, line-rate traffic and max PoE)	500W
Max power (worst case, all ports used, full PoE, line-rate traffic) (Watts)	28W
Idle power consumption (all ports link-down standby) (Watts)	22W
Fan	Fanless



<b>Environmental Specifications</b>		<b>IES7521-24PGE8GFC4TF-AC</b>
<b>Operating</b>		
Operating Temperature	-30° to 75°C (-22° to 167°F)	
Humidity	95% maximum relative humidity (RH), non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
<b>Storage</b>		
Storage Temperature	-40° to 85°C (-40° to 185°F)	
Humidity (relative)	95% maximum relative humidity, non-condensing	
Altitude	10,000 ft (3,000 m) maximum	
<b>Executive Standard &amp; Protection</b>		
<b>Lightning Protection</b>		
IEC61000-4-3 (RS)	10V/m (80~1000MHz)	
FCC Part 15/CISPR22 (EN55022)	Class B	
IEC61000-6-2	Common Industrial Standard	
IEC61000-4-9 (Pulsed magnet field)	1000A/m	
IEC61000-4-10 (Damped oscillation)	30A/m, 1MHz	
IEC61000-4-12/18 (Shockwave)	CM 2.5kV, DM 1kV	
IEC61000-4-4(EFT)	Power cable:±4kV, Data cable: ±2kV	
IEC61000-4-16(Common-mode transmission)	30V, 300V, 1s	
IEC61000-4-2 (ESD)	±8kV contact discharge, ±15kV air discharge	
IEC61000-4-6 (Radio frequency transmission)	10V(150kHz~80MHz)	
IEC61000-4-8 (Power frequency magnetic field)	100A/m, 1000A/m, 1s-3s	
IEC61000-4-5 (Surge): Power cable	CM±4kV/ DM±2kV, Data cable: ±4kV	
<b>Mechanical Properties</b>		
IEC60068-2-6	Anti Vibration	
IEC60068-2-32	Free Fall	
IEC60068-2-27	Anti Shock	

### Electromagnetic Emissions and Immunity

Certifications	CE mark, commercial FCC Part 15 Class A, VCCI Class A Class A EN 55022 (CISPR 22) Class A Class A C-Tick EN 55024 CCC 47 CFR FCC Part 15, SubpartB, Class A ICES-003: 2016 Issue 6, Class A ANSI C63.4:2014 IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS CISPR 22:2009+A1:2010 CLASS A
----------------	--

### Safety

Certifications	CB mark, commercial CSA certified (CSA 22.2 #950) EN 60950-1: 2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 IEC 60950-1:2005 (ed.2)+A1:2009+A2:2013 AN/NZS 60950.1:2015 CCC (China Compulsory Certificate)
----------------	---

### Warranty and Support

Hardware Limited Warranty	Limited Lifetime*
Technical Support via Phone and Email*	Limited Lifetime*
Limited Lifetime* 24x7 Online Chat Technical Support	Limited Lifetime*

### Package Contents

All models	Smart Industrial PoE Switch AC Power cord with C13 connector (localized to region of sale) Brackets and screws for rack mounting Rubber protection caps, which are already installed in the SFP sockets Installation guide User's manual
------------	---